

*HZB 12-120M Valve Regulated (AGM) Lead Acid Battery.
12 year design life for EXTREME applications.
12 Volts 120 Ah (C₂₀)*

Innovative Features

- Completely maintenance free, sealed VRLA (AGM) construction eliminates the need for watering
- Analytical Grade electrolyte
- Spill proof / leak proof
- Valve regulated Max internal pressure 2.5 psi
- Multi-position usage
- ABS Case and cover - V0 on request
- Low self discharge
- FAA and IATA approved as non-hazardous
- Built to comply with IEC 896-2, DIN 43534, BS 6290 Pt4, Euro bat.




Specifications

Nominal Voltage	12Volts
Nominal Capacity	120Ah @ 20hrs discharge rate to 1.75 V/cell
Design Life	12 Years
Operating Temperature	-20°C to 50°C
Grid alloy	Calcium/Tin lead alloy
Plates	Flat Pasted
Separator	Absorbent Glass Mat
Active material	Very high purity lead
Case and cover	ABS (VO on request)
Charge Voltage	Float 2.25-2.30 VPC@25°C Cycling 2.35@25°C Max. 2.4 VPC Max ripple 0.05C(A)
Electrolyte	Sulphuric acid Analytical grade purity
Venting Valve	EPDM Rubber 1.5 to 2 psi (10.5-14KPa) release pressure. Resealing at 1 psi (7 KPa)
Terminal	SAE Automotive. Epoxy sealed by extended mechanical paths
Torque setting	The recommended torque value for all types is 5-7 Nm
Cables	Connectors, cables, terminal covers on request.

AGM Range

Sealed Lead Acid 12 Volt Bloc

PRODUCTSHEET HZB12-120M




Haze Battery Company keenly encourages environmental awareness; PLEASE follow guidelines for the recycling / disposal of lead.

Website: www.hazebattery.com
E mail : sales@hazebattery.com

12VAGM



Specifications

Nominal Voltage		12V	
Nominal Capacity		120 Ah	
Dimensions	Height	207 mm	8.15 inches
	(Height Inc terminals)	227 mm	n/a inches
	Length	265 mm	10.43 inches
	Width	252 mm	9.92 inches
	Weight	38.2 Kg	84.42 lbs

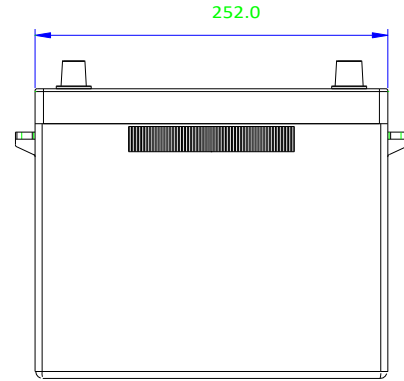

Characteristics

Capacity 20°C (68°F) to 1.75 V	20 hour rate	120.8 Ah
	10 hour rate	111.0 Ah
	5 hour rate	103.7 Ah
	1 hour rate	80.1 Ah
	15 min rate	52.8 Ah
	Internal Resistance	3.3m Ohms
	Impedance	1500 S
Capacity correction for Temperature Variations (C20)	40°C (104°F)	102%
	20°C (68°F)	100%
	0°C (32°F)	85%
	-15°C (5°F)	65%
Self Discharge 20°C (68°F)	Capacity after 1 months storage	98%
	Capacity after 3 months storage	94%
	Capacity after 6 months storage	86%
CCA @ -18°C Amps	650	
MCA @ 0°C Amps	911	
Terminal	Std	16mm Insert M6 thread
	Optional	Ccu Flag
Charging (Constant Voltage)	Cyclic	2.35-2.40 VPC (20-25°C)
	Float	2.27-2.30 VPC (15-25°C)

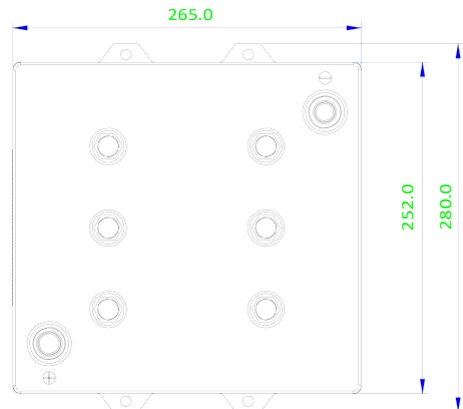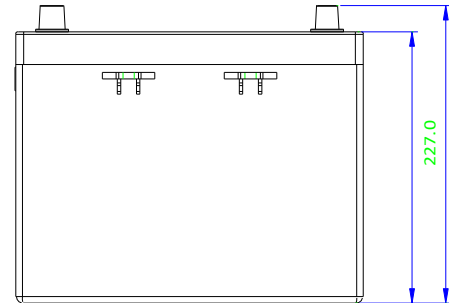

Constant Amps Discharge - Amps @ 20°C

End V per Cell	5M	10M	15M	20M	25M	30M	35M	40M	45M	60M	90M	2hr	3hr	4hr	5hr	8hr	10hr	12hr	20hr
1.90	234	187	155	134	120	109	98.1	90.0	83.1	67.0	49.7	39.6	28.3	22.2	18.4	12.1	9.91	8.39	5.28
1.85	283	218	179	153	135	121	110	99.7	92.1	74.5	54.3	42.9	30.7	24.0	19.8	12.9	10.6	8.98	5.69
1.80	322	242	201	169	147	130	117	106	97.3	77.6	56.3	44.4	31.7	24.8	20.3	13.3	10.8	9.23	5.91
1.75	344	257	211	178	154	136	122	110	101	80.1	57.9	45.7	32.5	25.3	20.7	13.6	11.1	9.43	6.04
1.70	367	268	217	182	157	138	124	112	102	81.4	58.7	46.5	33.0	25.7	21.1	13.8	11.3	9.61	6.16

Ampere Hour @ 20°C

EOD/cell	20hr								
1.90	79.1	84.8	88.8	91.8	96.7	99.1	101	106	
1.85	85.8	92.0	96.0	98.8	103	106	108	114	
1.80	88.9	95.0	99.1	102	106	108	111	118	
1.75	91.3	97.5	101	104	109	111	113	121	
1.70	92.9	99.1	103	105	110	113	115	123	

The Quality & Management system & facility governing the manufacture of this product are ISO 9001:2000 and ISO 14001:2004 certified.

